

Rectifier DPR 2700C-48CN

The Power behind.



Main features

- Efficiency 91 %
- 2880W nominal output
- 1440W output for temperature up to 70°C
- Compact and light weight
- Hot swappable, no system shutdown for maintenance
- Wide input voltage range: 90 - 310 V
- Power factor correction
- Constant output power characteristic
- Operating temperature range up to 70°C

Applications

- Indoor and outdoor
- Medium to large power systems
- Telecom, wireless, datacom, enterprise

Description

The rectifier DPR 2700C-48CN is a single phase, hot-pluggable, fan-cooled rectifier. The outstanding power density of this product offers the optimum 1U shelf solutions for easy integration into power systems. The constant output power characteristic supplies the specified power over the full output voltage range. The benefit is an optimised modular system design (fewer number of modules). These performances as well as the extended temperature range and wide input voltage range are the key factors of the success of this rectifier and it offers a cost effective and reliable solution.

The typical applications for this rectifier are both in indoor and outdoor environments, which is a perfect solution for wireless base stations, core network, telecommunication & data networks and central offices.


Rectifier DPR 2700C-48CN

Technical Specifications

General	
Efficiency	91.0%
Losses, max.	285W
Safety	EN 60 950 UL 60 950 CAN / CSA – C22.2 TUV/CE
EMI, radiated Compliant with	FCC Part 15, class A EN 55022, class A
Cooling	Fan cooled rectifier
Power density	34 W / inch ³
Acoustic noise	55 dB(A) at 25 Degree C

Input	
Voltage range	90 ... 310 V _{RMS}
Volt. range, red. power	90 ... 174 V _{RMS}
Inrush current	< 21.8 A
Harmonic distort. THD	< 5 %
Power factor	> 0.99
EMI, conducted	FCC Part 15, class A
Mains connector	Rear side
Input protection	Internal fuse 25A x 1
Input switch	None

Output	
Voltage, nominal	54 V _{DC}
Voltage adjust range	40 ... 59.5 V _{DC}
Voltage regulation	< ± 0.6 %
Overvoltage protection	59.5 V _{DC}
Ripple + spikes	≤ 100 mV _{p-p}
Psophometric noise	≤ 2.0 mV _{RMS} (weighted)
Current limit, nominal	50 A @ 54.0V _{DC}
Power limit	2880W Maximum
Load sharing	< ± 5 %
Output connector	Rear side
Output characteristic:	

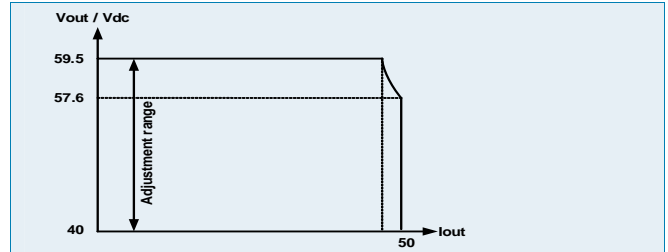

User interface	
Status indication	LED «AC ON», Green LED «RFA/FF», Red LED «CL», Yellow

Power system controller	
Applicable controller	CSU5 (System type) CSU501 (Case type) CSU502 (Case type)

Mechanics	
Width, overall	125.5 mm (4.94 in)
Height, overall	41.0 mm (1.61 in, 1U)
Depth, overall	269.9 mm (10.63 in)
Weight	2.0 kg (4.4 lb)

Environment	
Operating temperature	-20...+70 °C (-4...+160 °F)
Reduced temperature	+45...+70 °C (113...+160 °F)
Storage temperature	-40...+70 °C (-40...+158 °F)
Relative humidity	95 % max, non condensing
MTBF (Calculated)	300K hours (Telcordia SR-332)

Subject to change due to technical progress.