

POWER-WIN TECHNOLOGY CORP.

www.power-win.com

AC/DC Switching Adapter - Single Output

FEATURES

- High Reliability
- 100% Burn-In Tested
- 100% Hi-Pot tested
- Safety Approvals, EMC compliance

ELECTRICAL SPECIFICATIONS

- Input range : 90 - 264VAC (Full Range)
- Frequency : 47 - 63Hz
- Input current (rms) : 2.5A @ 90VAC; 1.25A @ 264VAC MAX.
- Power factor : > 0.9 @ full load, 115VAC
- Meet CEC & Energy Star requirements
- Efficiency : > 85% @ full load, 115VAC
- > 85% @ AVG. load 115/230 VAC for CEC Model
- Green functions = No load power consumption < 500mW
- Output voltage: +12V to +52V.
- Voltage regulation : +5% / -2%
- Maximum power (Po) : 150W
- Ripple & Noise : 2%
- Hold-up time : > 20ms typical at full load @ 115VAC
- Protection :
 - ◆ Short Circuit Protection: Auto Recover.
 - ◆ Over Load Protection: Auto Recover.
 - ◆ Over Voltage Protection: Latch, AC Recycle.

DC OUTPUT & FEATURES

Other DC output 140W for 12-14V, 150W for 15-26V, 33-39V and 44-52V.

Model	Output Rating		Po	O/P Regulation	Ripple & Noise(Vp-p)	CEC (IV)	Energy Star
PW-140A-1Y120H	12V	11.67A	140W	+5% / -2%	240mV	●	LEVEL IV
PW-150A-1Y160H	16V	9.38A	150W	+5% / -2%	320mV	●	LEVEL IV
PW-150A-1Y190H	19V	7.90A	150W	+5% / -2%	380mV	●	LEVEL V
PW-150A-1Y240H	24V	6.25A	150W	+5% / -2%	480mV	●	LEVEL V
PW-150A-1Y360H	36V	4.17A	150W	+5% / -2%	480mV	●	LEVEL V
PW-150A-1Y480H	48V	3.13A	150W	+5% / -2%	480mV	●	LEVEL V

Note: 1. Peak-to-peak with 20MHz bandwidth with a tantalum 10uF in parallel with a 0.1uF ceramic capacitor.

AD-A8 Series 150 Watts

With Active PFC



Dimension : L 170 x W 85 x H 44 mm
L 6.69 x W 3.35 x H 1.73 inch
AC Input : IEC 320-C14 Inlet

SAFETY STANDARDS

UL 60950-1
CSA C22.2-No.60950-1
TUV EN60950-1
CB IEC 60950-1

EMC STANDARDS

FCC Class B
CISPR22 Class B
EN 55022 Class B
CE

ENVIRONMENTAL

- Operating temperature : 0°C to +40°C
- Storage temperature : -10°C to +85°C
- Humidity: 20% ~ 90%.
- MTBF : > 80,000 hours at full load and 25°C ambient temperature



POWER-WIN TECHNOLOGY CORP.

5F-6, No. 79, Sec. 1, Hsin-Tai 5th Rd., Shi-Chi, Taipei Hsien 22101, Taiwan, R.O.C.

Tel : 886-2-2698-3989 (Rep) Fax : 886-2-2698-3978

http : //www.power-win.com

E-Mail : sales@power-win.com

POWER-WIN TECHNOLOGY CORP.


www.power-win.com

AC/DC Switching Adapter - Single Output

AD-A8 Series 150 Watts

With Active PFC

MECHANICAL SPECIFICATION

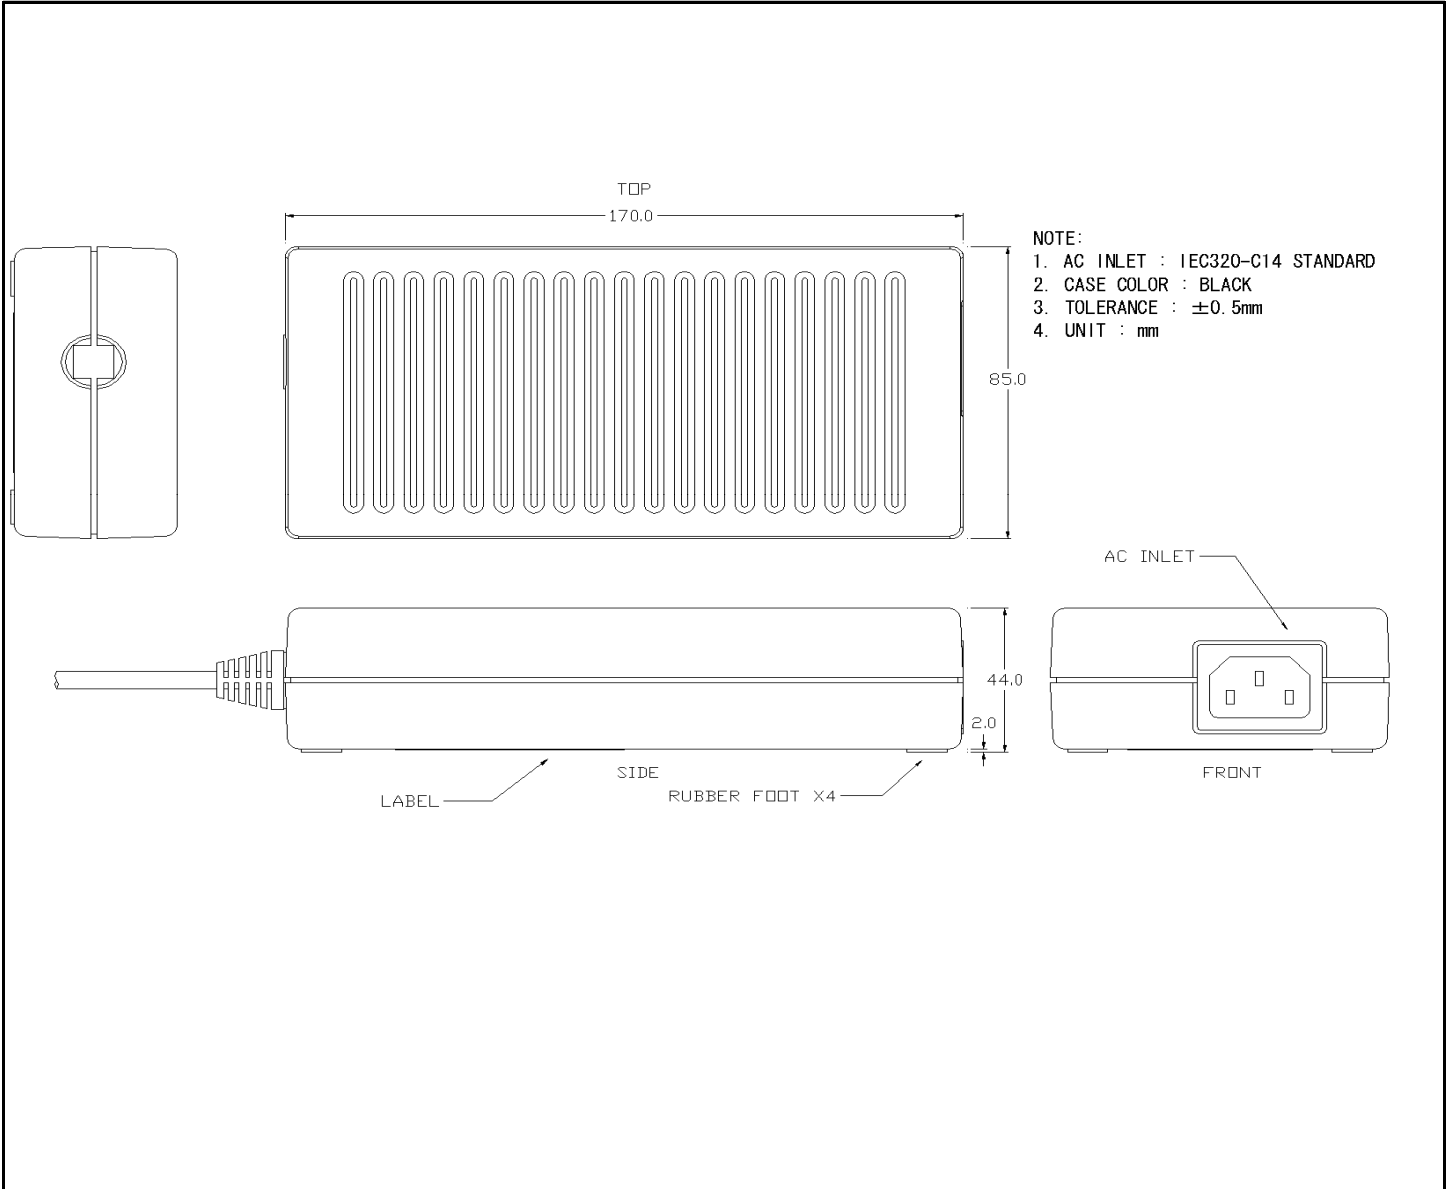

STANDARD OUTPUT CABLE

- 1. AWM 1571 # 14 AWG / 1C + SHIELDING, UL 80°C 30V VW-1, 1050 mm. (12-24V)
- 2. AWM 1185 # 16 AWG / 1C + SHIELDING, UL 80°C 300V VW-1, 1050 mm. (36-48V)
- 3. Depends on customers requirements.



POWER-WIN TECHNOLOGY CORP.

5F-6, No. 79, Sec. 1, Hsin-Tai 5th Rd., Shi-Chi, Taipei Hsien 22101, Taiwan, R.O.C.

Tel : 886-2-2698-3989 (Rep) Fax : 886-2-2698-3978

[http : //www.power-win.com](http://www.power-win.com)

E-Mail : sales@power-win.com

REV.B