

Electronic DC Load

Series ELA Power 250 Watt

Constant I-Mode or R-Mode
Master-Slave Mode

ext. programmable I-constant, without a G-Module installed
ext. programmable I-,U-,P- or G- constant with a G-Module installed

Options a.o.:
Installed IEEE488.2 (GPIB) / RS232* / USB* interface with Lab-View Driver (Series INT2E)
Installed USB Interface with driver software
External CAN Open Interface (on request)
G- Module
Front-End Unit
*selectable RS232 or USB



Units for Laboratory and Test

The Series ELA 250 load are electronic regulated DC loads with power up to 250Watt. It is designed at the latest MOS technologie with a DC load range starting at 0.35VDC up to 160VDC. Everywhere, DC loads are needed as a stand alone type or integrated via interface in any system applications, the ELA 250 series offers most intelligent features such as:
Minimum load voltage 0.35VDC / Load ON/OFF / Remote Control Port (RCP) with additional +15VDC voltage to supply external components / Local-Lockout / U- and I-Monitor outputs buffered / Load-On-Relay at Power-Up / a.m.m.

Input:

Input voltage 230VAC -10% +6%, 50-60Hz
Load voltage see table
Load current see table
Continuous Power see table

Regulation:

Set point accuracy $\leq 0,1\% I_{max}$
(Voltage change $\pm 20\%$)
Rise time (at 10-90% nominal value change I-Mode)
ELA250/75/20, ELA250/75/40 $U_L > 3V \leq 60\mu s$
 $U_L < 3V \leq 400\mu s$
ELA505/160/50 $U_L > 6V \leq 60\mu s$
 $U_L < 6V \leq 400\mu s$
Temperature coefficient $\leq 0.01\%/^{\circ}C I_{max}$
(after 15 min. working time, const. $T_{ambient.}$ and U_{mains})

Protection:

Overload protection power limit, short circuit protection
Overvoltage protection power shutdown $U_{max} +6\%$
Thermal protection power shutdown, auto recovery
Reverse polarity wattless current diode and fuse

Environmental Condition:

Operating temperature 0 - +40°C (non condensing)
Cooling int. fans, temperature controlled

Safety:

Safety standard EN 61010-1
Isolation
AC input - load input 2.3kV_{eff}
AC input - protective ground 1.35kV_{eff}
Load input - protective ground $U_L \leq 75V: 500V_{eff}$
 $U_L = 160V: 1kV_{eff}$

EMC:

Input EMI filter EN61000-6-3
Input immunity EN61000-6-1

Control, operation and instruments:

Manual adjust current and resistance 2 set values each (A and B) for 2 channels selectable with a coarse and fine potentiometer each per channel
Pulse-generator I, R 100Hz or 1kHz switch-selected, waveform: square-wave, duty cycle 1:1
Load ON/OFF-function load to be switched at high Ohm state
Load ON function load current \approx setpoint
Load OFF function load current ≈ 0 at any setpoint
Instruments load current, load voltage: LED digital
load current $\leq 50A: 3\text{-digits}$
load current = 100A: 3.5-digits
load voltage $\leq 75V: 3\text{-digits}$
load voltage 160V: 3.5-digits
accuracy: 0.2% $\pm 1d$
Error indication LED red: over temperature or over voltage
LED yellow: current limiting or power limiting
Parallel operation same units possible

Programming Interface (Remote Control Port):

jack RJ45
ext. control voltage 0 - 10V = 0 - I_{max}
any waveform,
bandwidth: (-3dB): 0 - 6kHz
accuracy: 0.2% I_{max}
Load ON/OFF function Load to be switched at high Ohm state
Monitor signal Load current, load voltage accuracy 0.2% I_{max}, U_{max}
Disturbance signal composit failure (active low) (OR-link at following failures: over temperature, over voltage, power limiting, current limiting)

Electrical Connections:

Input voltage Euro-plug with switch, rear side
 Load jack 4mmØ ≤ 40A

Dimensions and weight:

mounting form see table
 Dimensions The loads can be delivered as tabletop unit or as 19" rack mounted module.
 Weight

Option G-Module:

Programming 2 set values each at I-,U-, P-, G-Mode
 ext. voltage 0 - 10V = 0 - I_{max}
 ext. voltage 0 - 10V = 0 - P_{max}
 ext. voltage 0 - 10V = 0 - G_{max}
 ext. voltage 0 - 10V = 0 - U_{max}
 Load ON function Load current ≙ setpoint
 Load OFF function Load current = 0 at any setpoint
 Pulse generator I, G, P, U 1Hz, 10Hz, 100Hz or 1kHz*
 to be switched,
 waveform: square wave
 duty cycle 1:1
 *1kHz in U-Mode not available

Feed back signal load current, load voltage (0 - 10V)
 accuracy: 0.2% I_{max}, U_{max}

Disturbance signals signal: composit failure (active low)
 signal: over temperature, over voltage
 signal: over load, current limitation
 signal: under voltage

Lead for programming 25 pol. Sub D jack

output-power (W)	DC load-voltage (V)	Load-current (A)	Load-resistance (Ohm)	Model-Number
250	0.35 - 75	0 - 20	0.05 - 15k	ELA250/75/20
250	0.35 - 75	0 - 40	0.04 - 7.5k	ELA250/75/40
250	0.35 - 160	0 - 20	0.05 - 32k	ELA250/160/20

Pin assignment RCP-Interface (Remote Control Port):

RCP	SIGNAL (RJ45)
Pin8	Analog-GND
Pin7	Control Voltage 0-10V
Pin6	Actual load current 0-10V
Pin5	Actual load voltage 0-10V
Pin4	Signal composit failure
Pin3	Command Load ON/OFF
Pin2	Digital-GND
Pin1	Auxiliary voltage +15V (max. 20mA load capacity)

Options:

- Sub front panel colour AL nature anodized
 ELA 250 without INT2E: 6HE, 16TE
 ELA 250 with INT2E: 6HE, 19TE
- Front-End unit without operation instruments
- CAN Open interface (on request)
- G-Module
- RJ45 connector for ELA 250 (with option G-module at ELA 250 ...: Sub D connector is a standard)
- Integrated Interface IEEE488.2 (GPIB)/RS232*/USB*
 INT2E with Lab-View driver

Option INT2E:

Programming 2 set values each at I-, P-, G-Mode with G-module, (1 set value at I-Mode without G-module)
 resolution : 12Bit (4000 steps per range)
 accuracy: 0.25% I_{max} (I-Mode)
 1Hz, 10Hz, 100Hz or 1kHz*
 to be switched,
 waveform: square wave
 duty cycle 1:1
 *1kHz in U-Mode not available
 Puls generator I, G, P, U
 Monitor signal load current, load voltage
 resolution: 12 Bit (I_{max}/4000; U_{max}/4000)
 accuracy: 0.25% I_{max}, U_{max}
 Load ON function Load current ≙ setpoint
 Load OFF function Load current = 0 at any setpoint
 Function Local Lockout in remote the operation instruments at the front panel are not active
 Error signal signal: composit failure
 signal: over temperature, over voltage
 signal: powerlimiting, current limiting
 signal: under voltage
 Connectors 9 pole Sub D connceptor (RS232)
 24 pole IEEE488/GPIB-jack
 USB-jack type B

Shape, Dimensions, Weight					
Description	Shape	Width (mm)	High (mm)	Deep (mm)	Weight (kg)
Load without Interface					
Load as tabletop unit	6U A	70	220	340	4
Load with sub front panel for 19" rack mounting	6U A - T FPL	70	220	340	4
Load as 19" rack mounting unit with 2pcs ELA250	2U E	483	88,1	340	7,3
Load as 19" rack mounting unit with 1pcs ELA250, mounting on left hand side	2U E - L	483	88,1	340	4
Load as 19" rack mounting unit with 1pcs ELA250, mounting on right hand side	2U E - R	483	88,1	340	4
Load with Interface					
Load as tabletop unit	6U A	95	220	340	4
Load with sub front panel for 19" rack mounting	6U A - T FPL	95	220	340	4
Load as 19" rack mounting unit with 2pcs ELA250	3U E	483	132,5	340	8,2
Load as 19" rack mounting unit with 1pc ELA250, mounting on left hand side	3U E - L	483	132,5	340	4
Load as 19" rack mounting unit with 1pc ELA250, mounting on right hand side	3U E - R	483	132,5	340	4


Options:

- Cable for external stand alone interface INT2
- IEEE 4888/GPIB - cable
- zero modem cable
- USB cable

* RS232 or USB selectable


Electronic DC Load

Minimum Voltage ELA250:

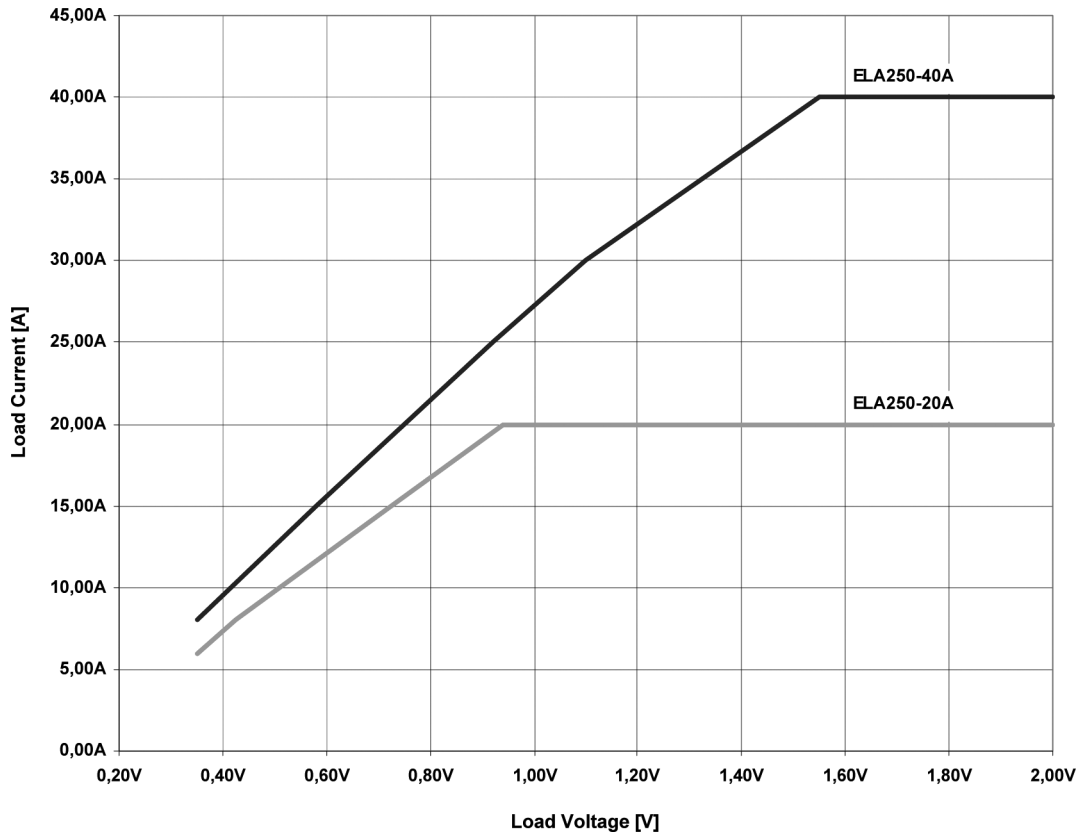


Units for Laboratory and Test


Operating Range ELA250:

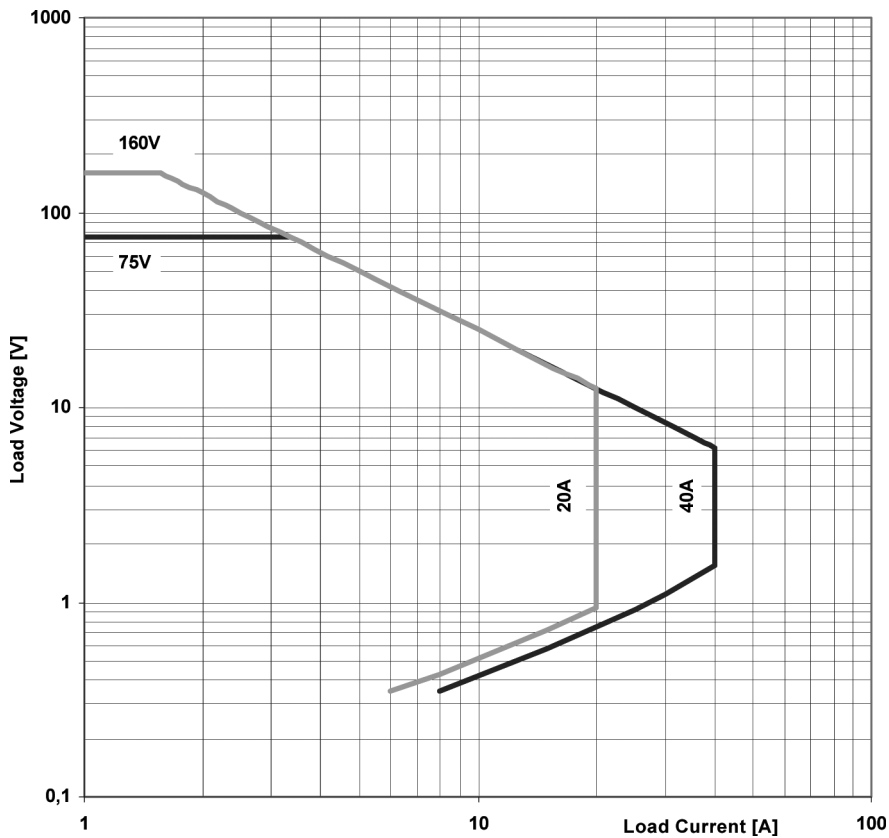


ELA 250 Watt:

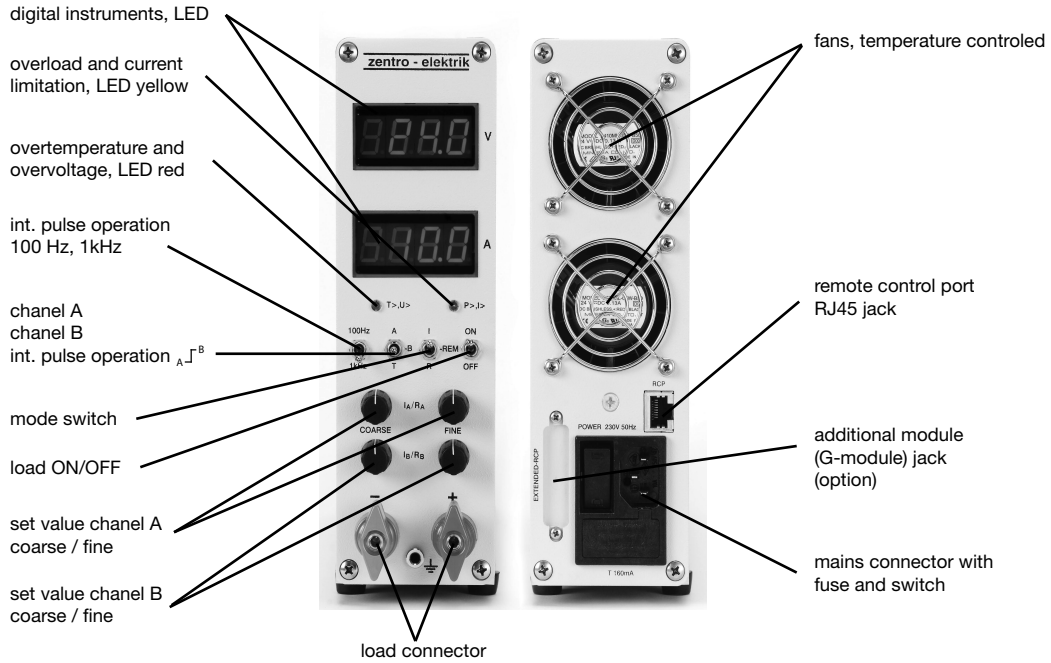

ELA 250 Watt, with Interface:

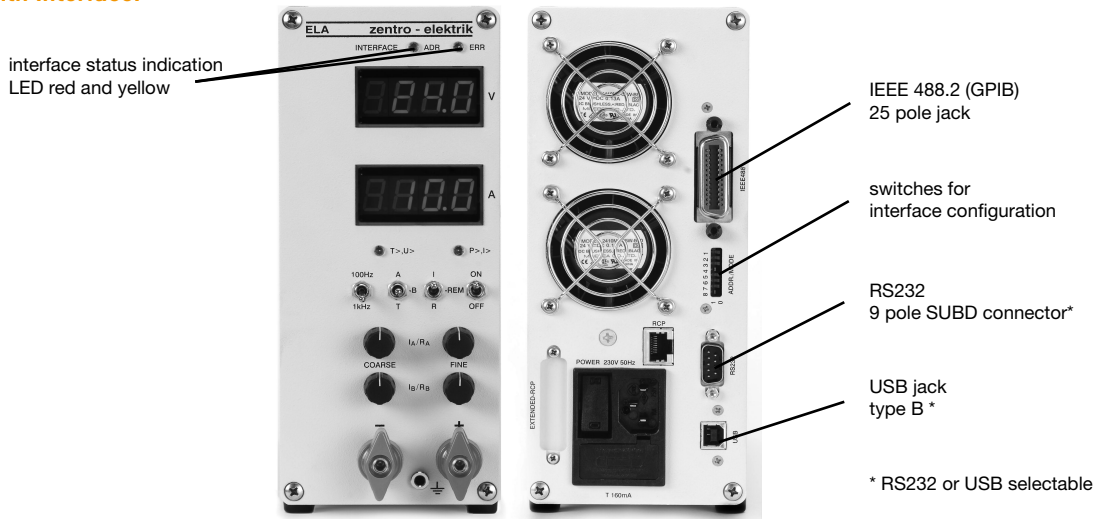

ELA 250 Watt, 2 pieces 19", 2U Front-view:

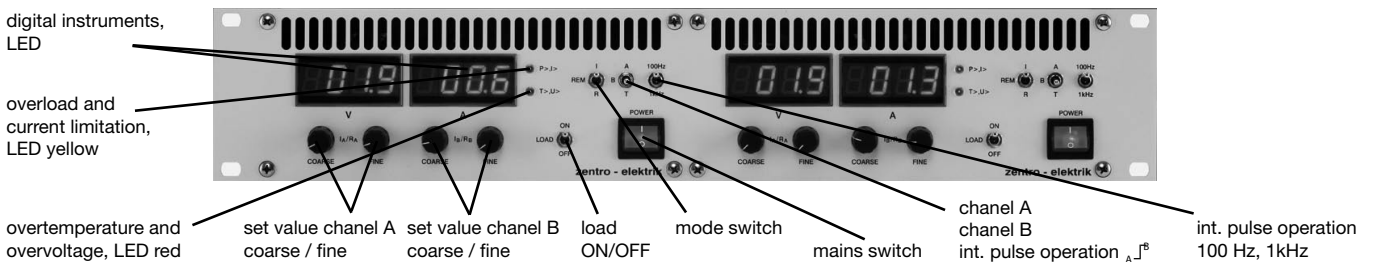

ELA 250 Watt, 2 pieces 19", 2U Back-view:

